




Front View



Rear View

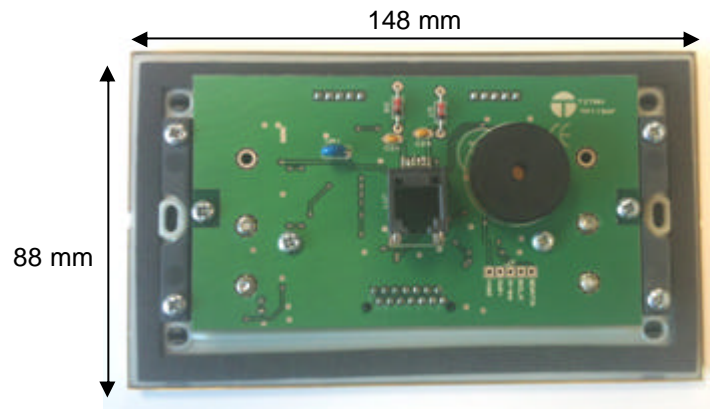

Side View

Technical Data

- * Graphics Display.
- * Touch sensitive buttons.
- * Use for commissioning aid via pass code entry
- * Flush mounting:- fits to a standard UK double gang recessed box.
- * Minimum depth of box is 35mm
- * Electrical connection and Communications via RJ11 lead from TITAN controller.
- * Maximum voltage:- 24V.
- * Power consumption:- 20mA
- * Operating Conditions:- +5 to +40°C and 0 to 80%RH non-condensing.
- * Standard finishes:- White Polycarbonate, Brushed Stainless Steel, Polished Chrome or Polished Brass. Other decorative finishes available subject to quantity.