


## ALARM INTEGRATOR MODULE:- AIM8 & AIM16

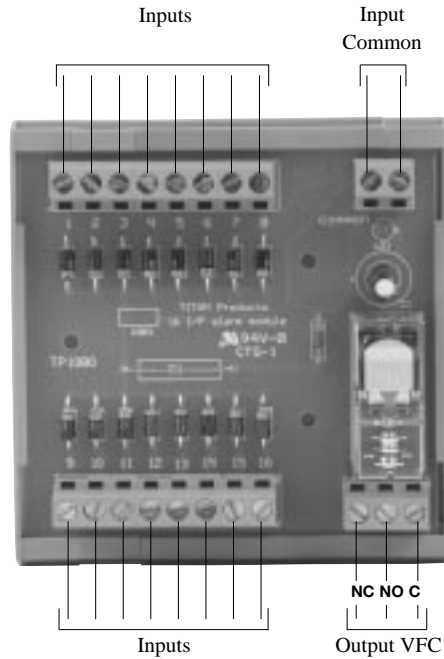

### DESCRIPTION

The AIM alarm integrators provide for 8 or 16 inputs to energise one common relay with volt free changeover contacts.

The Alarm integrators can be supplied for 24 Volts AC/DC inputs or 240 Volts. Other operating voltages are available on request.

For remote audible alarm and indication use with the TITAN Products RMP alarm panels.

### FEATURES

- \* Inputs 24 Volts AC /DC or 240 Volts AC
- \* Hazard cover on 240 Volts versions
- \* Common volt free changeover relay
- \* LED relay status indication
- \* DIN Rail mounting

### SPECIFICATION

Input	24V AC/DC or 240V AC Specify requirements
Output	Volt free 5A @ 240V AC
Power Consumption	30mA max.
LED indication	Relay energised
Terminals	1.0 mm
Operating Temp	-10 to +40°C
Dimensions	82 mm high 80 mm wide 50 mm deep
Mounting	DIN Rail
Order Code	AIM8/24    8 x 24V inputs AIM16/24    16 x 24V inputs AIM8/240    8 x 240V inputs AIM16/240    16 x 240V inputs Other voltages available on request



**Measurement Devices for Control Systems**

**Titan Products Ltd.**  
 Unit 7 Southside, Bredbury Park Industrial Estate, Bredbury  
 Stockport SK6 2SP England.  
 Tel :- 0161 406 6480 Fax :- 0161 494 8309  
 E-mail: [admin@titanproducts.com](mailto:admin@titanproducts.com)  
 Website: [www.titanproducts.com](http://www.titanproducts.com)

© Copyright Titan Products Ltd. 2002